




## Flexible top led Ribbon waterproof type

### ◆ Features:

1. This product adopts a kind of super flexible PCB board as a base. THE LEDs are evenly arranged on the board. Each body could be connected via mini waterproof connectors, The whole ribbon is as transparent as crystal when it is lit up. it is a kind of waterproof horizontal ribbon.
2. The LEDs select our type: [JY1210](#) , The luminous body is of very high intensity, large viewing angle, good quality and stability.
3. Our special waterproof craft not only makes the product completely waterproof ,but also keeps the ribbon flexible and easy-curved. The stability, reliability, and safety have been enhanced greatly. waterproof rate is IP64.
4. Three LEDs make a group and each group can be cut according to the length requirement. The ribbon is matched with wiring bridge in the middle of it, this design makes the ribbon can be easily connected after cutting, and you needn't weld wire as usual.
5. Available Color: Red, Yellow, Blue, White, Warm White, etc.
6. Consumption Watt:2.4W/0.5M.
7. LED spacing:16mm.
- 8.Special waterproof materials ensures the ribbon could work normally when temperature varies largely form -20°C to +60°C.It characters as easy for installation, stable, and energy-saving, it is really an ideal lighting decoration product for both indoor and outdoor, such as edge decoration, stair decoration ,car decoration, small floodlight, etc.
- 9.Package:3M/Reel or 0.5M/PC

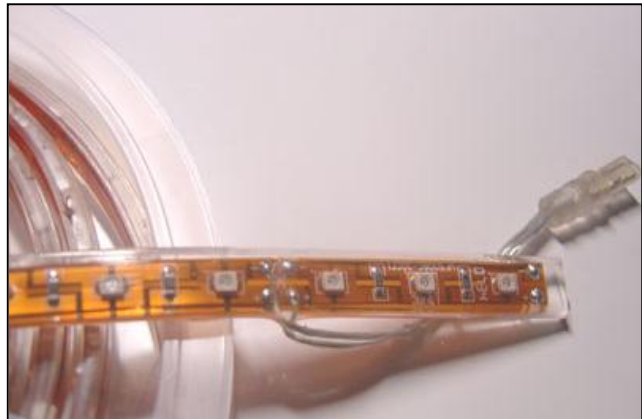

### ◆ accessory





**◆ Model and Technical Parameters:**

Description	Part No	Current Per Piece (mA)	Consumption Watts Per Piece	Number of LED	Max. No. of One Loop	Intensity(mcd)	Measurement
Red (0.5 meter)	JY-R30 R-SF	20mA*10	0.24W*10	30	12	600mcd*30	504*10mm
Yellow (0.5 meter)	JY-R30 Y-SF	20mA*10	0.24W*10	30	12	500mcd*30	504*10mm
Blue (0.5meter)	JY-R30 B-SF	20mA*10	0.24W*10	30	12	250mcd*30	504*10mm
Green (0.5 meter)	JY-R30 G-SF	20mA*10	0.24W*10	30	12	650mcd*30	504*10mm
White (0.5 meter)	JY-R30 W-SF	20mA*10	0.24W*10	30	12	1000mcd*30	504*10mm
White (3 meter)	JY-R30 WW-SF	20mA*10	0.24W*10	30	12	800mcd*30	504*10mm
Red (3 meter)	JY-R180 R-SF	20mA*10	0.24W*10	180	12	600mcd*180	3000*10mm
Yellow (3 meter)	JY-R180 Y-SF	20mA*10	0.24W*10	180	12	500mcd*180	3000*10mm
Blue (3meter)	JY-R180 B-SF	20mA*10	0.24W*10	180	12	250mcd*180	3000*10mm
Green (3meter)	JY-R180 G-SF	20mA*10	0.24W*10	180	12	650mcd*180	3000*10mm
White (3 meter)	JY-R180 W-SF	20mA*10	0.24W*10	180	12	1000mcd*180	3000*10mm
Warm White (3 meter)	JY-R180 WW-SF	20mA*10	0.24W*10	180	12	800mcd*180	3000*10mm

Note: Operating Voltage, 12V , view angle, 120° . Waterproof: IP67